

YOUR SUV & 4X4 SPECIALIST



PRODUCT RANGE 2025

SUMMER / WINTER / ALL-SEASON

BORN IN THE US IN 1915.
GENERAL TIRE. A BRAND OF CONTINENTAL.

**ANYWHERE
IS POSSIBLE**



ANYWHERE
IS POSSIBLE

GENERAL TIRE

MORE THAN 100 YEARS OF ADVENTURES

Whether you are driving on paved roads or navigating uncharted territory, General Tire offers SUV and 4x4 drivers robust and durable tyres for every application. With its American heritage, this is traditionally one of General Tire's core competences.

With more than 100 years of experience in the tyre industry and as a brand of Continental – a leading tyre manufacturer based in Germany – General Tire delivers products you can rely on – no matter how challenging the terrain may be!



MORE THAN 100 YEARS OF ADVENTURE



September 29th, 1915
William F. O'Neil, "W.O." and Winfred E. Fouse, found the General Tire and Rubber Company in Akron, Ohio.

1928 General Tire develops rubber flaps for truck tyres.



1940's Logo.

1944 General Tire began production in its 2nd U.S. facility in Waco, Texas; production phased out in 1986.



1960 A new material combination for compound is patented.



1969 General Tire ad - Sidewinder.



OCTOBER 30th, 1987
Continental Tire North America, Inc. finalises the acquisition of General Tire, Inc.

2008 General Tire re-enters Off-Road racing.



September 29th, 2015
General Tire celebrates 100 years in the rubber industry.

1915

1920

1930

1940

1950

1960

1980

1990

2000

2010

2020

2025



1920's Logo.



1920's The headquarters.

1930's The first international subsidiary is founded in Mexico.



1930's Nygen and fabric production.



1943 General Tire ad - Longer Mileage.



1960's Logo.

1970's General Tire slogan was "Sooner or later you'll own Generals".



1973 General Tire opens its 6th plant, equipped for full radial tyre production, in Mt. Vernon, Illinois.



2007 Introduction of a new logo to represent the brand for both the passenger / light truck and the commercial vehicle tyre divisions.



2019 / 2020 General Tire is Official Partner of NASCAR Whelen Euro Series.

ALL RANGES OF APPLICATION



ALL SEASONS – ALL TERRAINS

GRABBER X³



GRABBER AT³



GRABBER CROSS A/S



GRABBER HTS⁶⁰



GRABBER GT PLUS



GRABBER A/S 365



SNOW GRABBER PLUS



GRABBER X³

CONQUER YOUR TERRAIN



General Tire’s mud terrain tyre delivers outstanding off-road performance, coupled with good street manners.



► **EXTREME performance on MUD with engineered tread features.**

Enjoy extreme off-road maneuvers with aggressive and open pattern design that achieve high traction levels on mud, dirt, sand and gravel. Evacuation channels ensure quick and efficient self-cleaning action.

► **EXTREME performance in DIRT with superior grip.**

Experience superior loose surface grip with block chamfers and traction notches that provide additional biting edges and open the pattern. Stone bumpers that protect the groove bottom and minimise stone drilling improve tread life.

► **EXTREME performance on ROCK with breakthrough cut resistance.**

Conquer with confidence: multi-angle gripping edges arranged for grip in every direction and large sidewall lugs and deflection ribs that protect the tyre body. Master extreme off-roading with excellent grip and strong sidewall protection.




Speed Index
Q

Size
205 – 285 mm

Rim Size
15" – 20"

Series
55 – 85

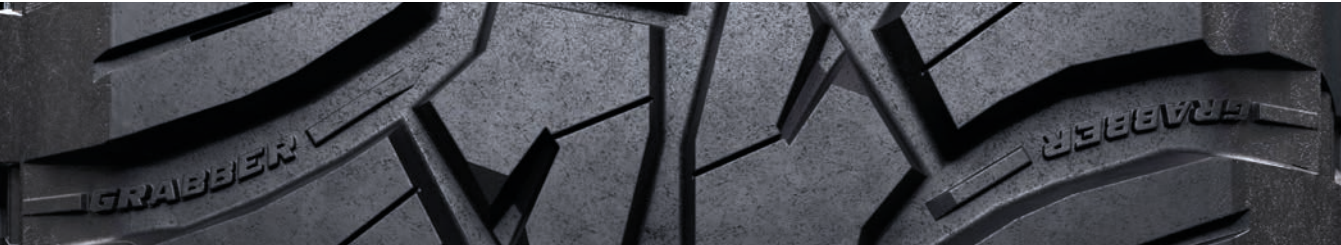

Rim diameter	Size ^{1) 2) 3)}	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)
			width (mm)	outer diameter (mm)	
15"	LT215/75 R 15 106/103Q LRD	5.5 – 7.0	229	723	2148
	LT235/75 R 15 110/107Q LRD	6.0 – 8.0	249	753	2239
	30 X 9.50 R 15LT 104Q LRC	6.0 – 8.0	260	771	2291
	31 X 10.50 R 15LT 109Q LRC	7.0 – 9.0	289	797	2366
	33 X 10.50 R 15LT 114Q LRC SRL ⁵⁾	7.0 – 9.0	289	850	2521
	35 X 12.50 R 15LT 113Q LRC	8.0 – 10.5	343	903	2675
16"	LT235/85 R 16 120/116Q LRE	6.0 – 7.5	249	828	2460
	205 R 16C 110/108Q LRD	5.5 – 6.5	216	750	2230
	LT225/75 R 16 115/112Q LRE	6.0 – 7.5	236	764	2273
	LT245/75 R 16 120/116Q LRE	6.5 – 8.0	263	795	2363
	LT265/75 R 16 119/116Q LRD	7.0 – 9.0	283	826	2454
	LT285/75 R 16 116/113Q LRC	7.5 – 9.5	303	858	2545
17"	LT265/70 R 16 121/118Q LRE	7.0 – 9.0	288	800	2376
	LT245/70 R 17 119/116Q LRE	6.5 – 8.0	263	796	2369
	LT265/70 R 17 121/118Q LRE	7.0 – 9.0	288	826	2454
	LT265/70 R 17 121/118Q LRE SRL ⁵⁾	7.0 – 9.0	288	826	2454
	LT285/70 R 17 121/118Q LRE	7.5 – 9.5	310	854	2539
	LT285/70 R 17 121/118Q LRE SRL ⁵⁾	7.5 – 9.5	310	854	2539
18"	33 X 12.50 R 17LT 114Q LRD	8.5 – 11.0	343	848	2521
	35 X 12.50 R 17LT 121Q LRE	8.0 – 10.5	343	901	2675
	35 X 12.50 R 17LT 121Q LRE SRL ⁵⁾	8.0 – 10.5	343	901	2675
	37 X 12.50 R 17LT 116Q LRC	8.0 – 10.5	343	954	2830
	LT265/65 R 17 120/117Q LRE	8.0 – 9.5	288	796	2369
	33 X 12.50 R 18LT 118Q LRE	8.5 – 11.0	343	847	2521
19"	LT265/65 R 18 117/114Q LRD	8.0 – 9.5	288	821	2369
	LT265/60 R 18 119/116Q LRE	8.0 – 9.5	288	793	2366
19"	255/55 R 19 111Q XL ⁴⁾	7.0 – 9.0	276	775	2327
20"	33 X 12.50 R 20LT 114Q LRE	8.5 – 11.0	343	845	2521
	35 X 12.50 R 20LT 121Q LRE	8.5 – 11.0	343	898	2675
	35 X 12.50 R 20LT 121Q LRE SRL ⁵⁾	8.5 – 11.0	343	898	2675

¹⁾ All sizes with rim protection (FR)
²⁾ All sizes with POR (Professional Off-Road) marking
³⁾ All POR tyres are excluded from the EU label regulation
⁴⁾ 2 ply construction, all tyres not noted with a 4) are 3 ply construction
⁵⁾ SRL = Smooth Red Letters



UNIQUE **RED** LETTER VULCANETTE PRODUCTION TYRES

Selected sizes are available in **Smooth Red Letter (SRL)**.

GRABBER AT³

EFFORTLESS ADVENTURES ACROSS ALL TERRAINS



Tackle any terrain with confidence! The GRABBER AT³ is the perfect choice for SUV and off-road vehicle drivers seeking both off-road adventure and on-road stability.



» Superior grip and performance.

Whether you’re driving on gravel, loose surfaces, stones, rocks or mud, the GRABBER AT³ will always provide exceptional grip, delivering great traction and effective braking as you steer your vehicle safely through your latest adventure.

» Take on any terrain with ease.

The GRABBER AT³ is up for any adventure you care to take, especially on rough terrain. Experience long tyre life and dependable stability under all approved load conditions.

» Enjoy effortless driving.

Adventure and comfort form a great team. The tread design of the GRABBER AT³ makes for smooth and comfortable on-road driving as you already look forward to your next off-road adventure!

TRACGEN
TCG
TECHNOLOGY

DURAGEN
EG
TECHNOLOGY

COMFORT BALANCE
CB
TECHNOLOGY



Speed Index
S / T / H / R / V

Size
195 – 315 mm

Rim Size
15" – 22"

Series
40 – 85



Rim diameter	Size ^{1) 2)}	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
15"	195/80 R 15 96T	5.0 – 6.5	204	705	2114	E	D	72/B	✓
	LT215/80 R 15 112/109S LRE	5.5 – 7.0	229	745	2215	E	B	75/B	✓
	205/75 R 15 97T	5.0 – 7.0	211	701	2101	E	D	72/B	✓
	215/75 R 15 100T	5.5 – 7.0	225	715	2144	E	D	72/B	✓
	225/75 R 15 102T	6.0 – 7.5	232	733	2193	E	D	72/B	✓
	LT235/75 R 15 110/107S LRD OWL	6.0 – 8.0	249	753	2239	E	B	75/B	✓
	LT245/75 R 15 113/110S LRD	6.5 – 8.5	263	769	2288	E	B	75/B	✓
	205/70 R 15 96T	5.0 – 7.0	217	681	2040	E	D	72/B	✓
	205/70 R 15C 106/104S LRD	5.5 – 6.5	217	681	2027	E	B	75/B	✓
	225/70 R 15 100T	6.0 – 7.5	237	709	2126	E	D	72/B	✓
	255/70 R 15 112T XL	6.5 – 8.5	270	753	2254	D	D	73/B	✓
	265/70 R 15 112T	7.0 – 9.0	283	767	2297	D	D	73/B	✓
	31 X 10.50 R 15LT 109S LRC OWL	7.0 – 9.0	289	797	2366	E	B	75/B	✓
16"	LT235/85 R 16 120/116S LRE OWL	6.0 – 7.5	249	828	2460	D	B	75/B	✓
	205 R 16C 110/108S LRD	5.5 – 6.5	216	750	2230	E	B	75/B	✓
	205/80 R 16 104T XL	5.0 – 7.0	211	748	2239	D	D	72/B	✓
	225/75 R 16 108H XL	6.0 – 7.5	232	758	2269	D	D	72/B	✓
	LT225/75 R 16 115/112S LRE OWL	6.0 – 7.5	236	764	2273	E	B	75/B	✓
	LT245/75 R 16 120/116S LRE OWL	6.5 – 8.0	263	795	2363	D	B	75/B	✓
	215/70 R 16 100T	5.5 – 7.0	230	720	2159	E	D	72/B	✓
	225/70 R 16 103T	6.0 – 7.5	237	734	2202	E	D	72/B	✓
	LT235/70 R 16 110/107S LRD OWL	6.0 – 8.0	254	756	2248	E	B	75/B	✓
	245/70 R 16 111H XL	6.5 – 8.0	258	764	2288	D	D	72/B	✓
	LT245/70 R 16 113/110S LRD OWL	6.5 – 8.0	263	770	2291	E	B	75/B	✓
	LT255/70 R 16 120/117S LRE OWL	6.5 – 8.5	276	784	2333	E	B	75/B	✓
	265/70 R 16 112H	7.0 – 9.0	283	792	2373	D	D	73/B	✓
	LT265/70 R 16 121/118S LRE OWL	7.0 – 9.0	288	800	2376	D	B	75/B	✓
	LT215/65 R 16 103/100S LRD	6.5 – 7.5	234	704	2097	E	B	75/B	✓
	235/65 R 16 C 121/119R	6.5 – 7.5	250	724	2157	D	B	75/B	✓
	255/65 R16 109H	7.0 – 9.0	270	752	2251	D	D	73/B	✓
	235/60 R16 100H	6.5 – 8.5	250	700	2098	E	D	72/B	✓
17"	225/70 R 17 108T XL	6.0 – 7.5	237	760	2281	D	D	72/B	✓
	LT225/70 R 17 115/112S LRE	5.5 – 7.5	242	766	2285	E	B	75/B	✓
	235/70 R 17 111H XL	6.0 – 8.0	250	776	2324	D	D	72/B	✓
	245/70 R 17 114T XL	6.5 – 8.0	258	790	2367	D	D	72/B	✓
	265/70 R 17 115T	7.0 – 9.0	283	818	2452	D	D	73/B	✓
	LT265/70 R 17 112/109T LRC OWL	7.0 – 9.0	288	826	2454	D	B	75/B	✓
	LT265/70 R 17 121/118S LRE OWL	7.0 – 9.0	288	826	2454	E	B	75/B	✓
	LT285/70 R 17 116/113S LRC	7.5 – 9.5	310	854	2539	D	B	75/B	✓
	LT315/70 R 17 121/118S LRE OWL	8.0 – 10.5	342	898	2648	D	B	75/B	✓
	225/65 R 17 102H	6.0 – 8.0	237	736	2208	E	D	72/B	✓
	235/65 R 17 108H XL	6.5 – 8.5	250	750	2251	D	C	72/B	✓
	235/65 R 17 108V XL	6.5 – 8.5	250	750	2251	D	D	72/B	✓
	245/65 R 17 111H XL	7.0 – 8.5	258	762	2288	D	C	72/B	✓
	LT255/65 R 17 114/110S LRD	7.5 – 9.0	276	784	2333	E	B	75/B	✓
	265/65 R 17 112H	7.5 – 9.5	283	790	2367	D	D	73/B	✓
	LT265/65 R 17 120/117S LRE OWL	8.0 – 9.5	288	796	2369	D	B	75/B	✓
	LT285/65 R 17 121/118S LRE	8.5 – 10.0	310	824	2448	D	B	75/B	✓
	215/60 R 17 96H	6.0 – 7.5	230	700	2105	E	D	72/B	✓
	225/60 R 17 99H	6.0 – 8.0	237	712	2141	D	D	72/B	✓
	235/55 R 17 99H	6.5 – 8.5	255	700	2105	E	D	72/B	✓
	235/55 R 17 103H XL	6.5 – 8.5	255	700	2105	D	D	72/B	✓

¹⁾ All sizes with rim protection (FR)

²⁾ All sizes with 3PMSF

C – E
Fuel Efficiency

B – D
Wet Grip

B (72–75 dB)
Noise

Snow Grip

Rim diameter	Size ^{1) 2)}	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
18"	255/70 R 18 116H XL	6.5 – 8.5	270	829	2486	D	D	73/B	✓
	265/65 R 18 114T	7.5 – 9.5	283	815	2443	D	C	73/B	✓
	LT265/65 R 18 117/114S LRD OWL	8.0 – 9.5	288	821	2445	E	B	75/B	✓
	275/65 R 18 116T	7.5 – 9.5	290	829	2486	D	C	73/B	✓
	225/60 R 18 104H XL	6.0 – 8.0	237	737	2217	D	D	72/B	✓
	235/60 R 18 107H XL	6.5 – 8.5	250	751	2254	D	C	72/B	✓
	LT255/60 R 18 112/109S LRD	7.5 – 9.0	276	781	2330	E	B	75/B	✓
	255/60 R 18 112H XL	7.0 – 9.0	270	775	2327	D	D	73/B	✓
	265/60 R 18 110H	7.5 – 9.5	283	787	2364	C	C	73/B	✓
	265/60 R 18 110H FR OWL	7.5 – 9.6	283	787	2364	C	C	73/B	✓
	LT265/60 R 18 119/116S LRE	8.0 – 9.5	288	793	2366	E	B	75/B	✓
	285/60 R 18 116H	8.0 – 10.0	304	813	2437	D	C	75/B	✓
	LT285/60 R 18 118/115S LRD	8.5 – 10.0	310	819	2439	E	B	75/B	✓
	235/55 R 18 104H XL	6.5 – 8.5	255	725	2181	D	D	72/B	✓
	255/55 R 18 109H XL	7.0 – 9.0	276	749	2248	D	D	73/B	✓
	225/55 R 18 102V XL	6.0 – 8.0	242	715	2150	D	D	72/B	✓
	235/50 R 18 101H XL	6.5 – 8.5	255	703	2114	tbd ³⁾	tbd ³⁾	tbd ³⁾	✓
	225/50 R 18 99V XL	6.0 – 8.0	242	693	2083	D	D	72/B	✓
19"	255/65 R 19 114H XL	7.0 – 9.0	270	829	2486	tbd ³⁾	tbd ³⁾	tbd ³⁾	✓
	255/60 R 19 113V XL	7.0 – 9.0	270	801	2406	D	D	73/B	✓
	235/55 R 19 105H XL	6.5 – 8.5	255	751	2260	D	D	72/B	✓
	255/55 R 19 111H XL	7.0 – 9.0	276	775	2327	D	D	73/B	✓
	255/50 R 19 107H XL	7.0 – 9.0	276	749	2254	D	D	73/B	✓
20"	255/60 R 20 113H XL	7.0 – 9.0	270	826	2483	D	D	73/B	✓
	275/60 R 20 115H	7.5 – 9.5	290	852	2556	E	C	73/B	✓
	255/55 R 20 110H XL	7.0 – 9.0	276	800	2403	D	D	73/B	✓
	275/55 R 20 117H XL	7.5 – 9.5	295	822	2471	D	C	73/B	✓
	265/50 R 20 111V XL	7.5 – 9.5	288	784	2361	D	D	73/B	✓
	275/50 R 20 113H XL	7.5 – 9.5	295	796	2391	tbd ³⁾	tbd ³⁾	tbd ³⁾	✓
	285/50 R 20 116H XL	8.0 – 10.0	309	806	2422	D	C	75/B	✓
	305/50 R 20 120T XL	8.5 – 11.0	329	826	2483	D	C	75/B	✓
	275/45 R 20 110H XL	8.5 – 10.5	284	766	2306	D	C	73/B	✓
	275/45 R 20 110V XL	8.5 – 10.5	284	766	2306	D	C	73/B	✓
	275/40 R 20 106H XL	9.0 – 11.0	289	736	2220	E	C	73/B	✓
	275/40 R 20 106V XL	9.0 – 11.0	289	736	2220	D	C	73/B	✓
21"	265/45 R 21 108H XL	8.5 – 10.0	277	781	2352	tbd ³⁾	tbd ³⁾	tbd ³⁾	✓
	275/45 R 21 110V XL	8.5 – 10.5	284	791	2382	D	C	73/B	✓
22"	HL275/45 R 22 115H XL	8.5 – 9.5	284	817	2461	D	C	73/B	✓
	285/45 R 22 114H XL	9.0 – 10.5	296	825	2486	D	C	75/B	✓
	275/40 R 22 108V XL	9.0 – 11.0	289	787	2376	D	C	73/B	✓
	285/40 R 22 110V XL	9.5 – 11.0	302	797	2400	D	C	75/B	✓
GRABBER AT ²									
16"	LT265/75 R 16 121/118R (123/120S) LRE	7.0 – 9.0	283	826	2454	D	B	75/B	✓

¹⁾ All sizes with rim protection (FR)

²⁾ All sizes with 3PMSF

³⁾ To be decided

 C – E
Fuel Efficiency

 B – D
Wet Grip

 B (72–75 dB)
Noise


Snow Grip



GRABBER AT³

CAMPING AND VAN SIZES

Drivers of campers and vans do not only navigate on asphalt, but also head off-road on different terrains like rocky tracks or gravel paths. General Tire has the right fitment for this target group: the GRABBER AT³ sizes with C marking.

The GRABBER AT³ is the ultimate choice for camping and van drivers who seek both adventure off the track and stability on the road.



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
16"	205/65 R16C 107/105T	5.5 - 6.5	217	682	2036	E	C	75/B	✓
	205/75 R16C 110/108R	5.5 - 6.5	211	726	2163	E	C	75/B	✓
	215/65 R16C 109/107T	6.0 - 7.0	230	698	2079	E	C	75/B	✓
	235/65 R 16 C 121/119R	6.5 - 7.5	250	724	2157	D	B	75/B	✓
18"	255/55 R18CP 120/118R	7.5 - 8.5	276	749	2233	E	C	75/B	✓



LIGHT TRUCK VS. STANDARD TYRE DISCOVER THE DIFFERENCE

Ever wondered what makes **Light Truck (LT)** tyres so special? Let's take a look!

Light Truck (LT) tyres are designed to carry heavier loads. Their reinforced construction results in an increased weight compared to **standard** tyres. They are ideal for off-roading in a 4x4 vehicle, because their strong build also makes them less likely to be punctured by sharp objects on the trail.



GRABBER CROSS A/S

FAST ROADS X TOUGH TRAILS



The GRABBER CROSS A/S is the perfect tyre for SUV drivers looking for both exceptional on-road performance and reliable off-road capabilities in every season!

Experience a new level of confidence and control as you embrace every journey, no matter if you are driving on smooth highways or conquering tough trails.

Don't Let the Weather Hold You Back

The new innovative cross-over compound of the GRABBER CROSS A/S provides reliability and safety in conditions like rain, snow, or slush. No matter the weather, this tyre will keep you steady, on or off the road.

Made to Be Fast

On smooth asphalt or through challenging corners, the GRABBER CROSS A/S performs extraordinarily at high speeds. It is designed to offer a fast, comfortable ride along with extended performance. With its low noise level and exceptional high mileage, this tyre makes every moment behind the wheel a real pleasure.

Built to Be Tough

Where the road ends, this tyre takes over. Whether it's dirt, gravel or tough terrain, the GRABBER CROSS A/S makes it possible to challenge even in off-road condition. Wherever your journey takes you, this robust tyre delivers both reliable stability and long-lasting durability.



Speed Index
S / H / V

Size
205 – 285 mm

Rim Size
16" – 22"

Series
40 – 70



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
16"	215/65 R 16 98H	6.0 – 7.5	238	705	2090	C	C	72/B	✓
	245/70 R 16 111H XL	6.5 – 8.0	266	772	2290	C	D	72/B	✓
	255/70 R 16 111H	6.5 – 8.5	278	786	2330	D	C	72/B	✓
	265/70 R 16 112H XL	7.0 – 9.0	291	800	2375	D	D	72/B	✓
17"	205/55 R 17 95V XL	5.5 – 7.5	231	675	2005	C	C	72/B	✓
	215/55 R 17 94V	6.0 – 7.5	243	685	2035	C	C	72/B	✓
	215/60 R 17 96H	6.0 – 7.5	238	707	2105	C	C	72/B	✓
	215/60 R 17 96V	6.5 – 7.5	238	707	2105	C	C	72/B	✓
	215/65 R 17 99V	6.5 – 7.5	238	731	2170	C	C	72/B	✓
	225/60 R 17 99H	6.0 – 8.0	245	719	2140	C	C	72/B	✓
	225/60 R 17 99V	6.0 – 8.0	245	719	2140	C	C	72/B	✓
	225/65 R 17 102H	6.0 – 8.0	245	743	2210	C	C	72/B	✓
	235/55 R 17 103V XL	6.5 – 8.5	263	707	2105	C	C	72/B	✓
	235/60 R 17 108V XL	6.5 – 8.5	258	758	2250	C	C	72/B	✓
	265/65 R 17 112S	7.5 – 9.5	291	798	2365	C	D	72/B	✓
	205/65 R 17 100H	5.5 – 7.5	225	715	2130	C	C	72/B	✓
	265/60 R 18 110H	7.5 – 9.5	291	795	2365	C	C	72/B	✓
	215/50 R 18 92H	6.0 – 7.5	243	688	2055	C	C	72/B	✓
18"	215/55 R 18 95H	6.0 – 7.5	243	710	2115	D	C	72/B	✓
	225/55 R 18 98V	6.0 – 8.0	250	722	2150	C	C	72/B	✓
	225/60 R 18 100H	6.0 – 8.0	245	744	2215	C	C	72/B	✓
	235/55 R 18 104V XL	6.5 – 8.5	263	732	2180	B	C	72/B	✓
	235/60 R 18 107V XL	6.5 – 8.5	258	759	2255	C	C	72/B	✓
	255/55 R 18 109V XL	7.0 – 9.0	284	756	2250	C	C	72/B	✓
	255/60 R 18 112H XL	7.0 – 9.0	278	783	2325	C	D	72/B	✓
	225/45 R 19 96V XL	7.0 – 8.5	242	700	2090	C	C	72/B	✓
	225/55 R 19 99V	6.5 – 8.5	250	748	2230	C	C	72/B	✓
	235/50 R 19 103V XL	6.5 – 8.5	263	736	2195	C	C	72/B	✓
19"	235/55 R 19 105V XL	6.5 – 8.5	263	759	2260	B	C	72/B	✓
	245/45 R 19 102V XL	7.5 – 9.0	261	718	2145	C	C	72/B	✓
	255/45 R 19 104V XL	8.0 – 9.5	273	730	2175	C	C	72/B	✓
	255/50 R 19 107V XL	7.0 – 9.0	284	756	2255	C	C	72/B	✓
	255/55 R 19 111V XL	7.0 – 9.0	284	783	2325	C	C	72/B	✓
	235/45 R 20 100V XL	7.5 – 9.0	253	735	2195	C	C	72/B	✓
	235/50 R 20 104V XL	6.5 – 8.5	263	762	2270	C	C	72/B	✓
	245/45 R 20 103V XL	7.5 – 9.0	261	743	2220	C	C	72/B	✓
	255/40 R 20 101V XL	8.5 – 10.0	278	727	2170	C	C	72/B	✓
	255/45 R 20 105V XL	8.0 – 9.5	273	755	2250	C	C	72/B	✓
20"	255/50 R 20 109V XL	7.0 – 9.0	284	782	2330	C	C	72/B	✓
	275/45 R 20 110V XL	8.5 – 10.5	292	774	2305	C	C	72/B	✓
	275/50 R 20 113V XL	7.5 – 9.5	303	804	2390	C	D	72/B	✓
	235/55 R 20 105V XL	6.5 – 8.5	263	784	2335	C	C	72/B	✓
	275/50 R 21 113V XL	7.5 – 9.5	303	829	2465	C	D	72/B	✓
21"	285/45 R 22 114H XL	9.0 – 10.5	304	833	2485	C	D	72/B	✓
22"									

¹⁾ All sizes with rim protection (FR)



GRABBER CROSS A/S

ON THE ROAD AND BEYOND!

Unlock the potential of your SUV to explore more!

Combined with its exceptional all-season performance, the GRABBER CROSS A/S allows your SUV to go further – regardless of the weather or the challenge that lies ahead. Whether driving on grass, gravel, or rocky paths, this tyre is the ultimate companion for those who seek adventure beyond the ordinary!



GRABBER HTS⁶⁰

PERFECT SYNERGY OF COMFORT,
DURABILITY AND PERFORMANCE



The tough highway terrain tyre with extremely well balanced product performance and significantly improved tread life.



► **Excellent ride quality and exceptional grip in wet conditions.**

The advanced pattern design with multiple block edges and sipes equips the tread with a high number of grip edges to ensure excellent ride quality with remarkable control even on wet surfaces.

► **Improved tread life in rugged terrain conditions.**

With a robust compound that achieves excellent cut and chip resistance, the tread continues to perform great, even on harsh terrains

► **Comfortable and pleasant ride.**

A cushioned tread isolates the vehicle from road disturbances with an absorption layer. Ribs located on both sides of the pattern work as a sound barrier to reduce sound generated in the centre of the pattern.

► **High mileage thanks to even wear and extended tread life.**

The StabiliTread Technology combines a flat footprint for even pressure distribution with optimised pattern stiffness to minimise wear-causing distortion. With additional long wearing tread compound the tyre’s wear resistance improved significantly.



Speed Index
S / T / H

Size
235 – 285 mm

Rim Size
16" – 22"

Series
45 – 75



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
16"	LT245/75 R 16 120/116S LRE OWL	6.5 – 8.0	263	795	2363	D	C	72/B	–
17"	235/70 R 17 111T XL OWL	6.0 – 8.0	250	776	2324	D	D	72/B	–
	245/65 R 17 111T XL OWL	7.0 – 8.5	258	762	2288	D	D	72/B	–
	245/65 R 17 107H	7.0 – 8.5	258	762	2288	D	D	71/B	–
	265/65 R 17 112T OWL	7.5 – 9.5	283	790	2367	D	C	72/B	–
	265/65 R 17 112H	7.5 – 9.5	283	790	2367	D	C	72/B	–
18"	285/65 R 17 116H	8.0 – 10.0	304	816	2446	D	C	74/B	–
	265/65 R 18 114T OWL	7.5 – 9.5	283	815	2443	D	C	72/B	–
	265/60 R 18 110H	7.5 – 9.5	283	787	2364	D	C	72/B	–
20"	275/50 R 20 113H XL	7.5 – 9.5	287	786	2470	C	D	72/B	–
	275/60 R 20 115S	7.5 – 9.5	290	852	2556	A	D	72/B	–
22"	275/50 R 22 115H XL	7.5 – 9.5	295	847	2547	tbd ²⁾	tbd ²⁾	tbd ²⁾	–
	285/45 R 22 114H XL	9.0 – 10.5	296	825	2486	D	C	75/B	–

Grabber HTS									
17"	P245/70 R 17 108S	6.5 – 8.0	258	790	2367	D	C	71/B	–

¹⁾ All sizes with rim protection (FR)

²⁾ To be decided



A/D



C/D



B (71–75 dB)



Snow Grip

GRABBER GT PLUS

FEEL CONFIDENT ON ANY TERRAIN



Equipped with exceptional robustness and enhanced durability, the GRABBER GT PLUS is your perfect partner for making every ride an enjoyable experience!



Stay relaxed on every journey.

No more challenging road conditions! Benefit from an incredibly sturdy design that provides greater stability than a conventional on-road tyre of the same size. Just settle in at the wheel and forget about kerb damage or rough terrain. With its exceptional robustness, your tyre is sure to deliver a worry-free ride.

Stay on the safe side whatever the weather.

With the GRABBER GT PLUS, there is no such thing as so-called “bad weather”. Thanks to its excellent traction, your tyre will keep you feeling safe even in heavy rain. The GRABBER GT PLUS couldn’t care less what the weather forecast says; it simply serves up a whole new level of reliability.

Your companion for countless miles.

Unreachable distances don’t exist. The GRABBER GT PLUS will accompany you on any trip you care to take. With its matchless durability, this tyre will carry you wherever you want to go, no matter how far away it may be.




Speed Index	Size	Rim Size	Series
H / V / T / W / Y	195 – 315 mm	15" – 23"	35 – 80



¹⁾ All sizes with rim protection (FR)

²⁾ To be decided



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% – 2.5% (mm)				
			width (mm)	outer diameter (mm)					
15"	195/80 R 15 96H	5.0 – 6.5	204	705	2114	D	A	71/B	–
	205/70 R 15 96H	5.0 – 7.0	217	681	2040	C	A	71/B ²⁾	–
16"	205/60 R 16 96V XL	5.5 – 7.5	217	662	1989	C	A	72/B	–
	205/80 R 16 104T XL	5.0 – 7.0	211	748	2239	C	A	72/B	–
	215/70 R 16 100H	5.5 – 7.0	230	720	2159	C	A	71/B	–
	225/70 R 16 103H	6.0 – 7.5	237	734	2202	C	A	71/B	–
	235/70 R 16 106H	6.0 – 8.0	250	750	2245	C	A	71/B	–
	245/70 R 16 111H XL	6.5 – 8.0	258	764	2288	C	A	72/B	–
	255/70 R 16 111H	6.5 – 8.5	270	778	2330	C	A	72/B	–
	265/70 R 16 112H	7.0 – 9.0	283	792	2373	C	A	72/B	–
	215/65 R 16 98H	6.0 – 7.5	230	698	2092	C	A	71/B	–
	215/65 R 16 102V XL	6.0 – 7.5	230	698	2092	C	A	72/B	–
	255/65 R 16 109H	7.0 – 9.0	270	752	2251	C	A	72/B	–
	235/60 R 16 100H	6.5 – 8.5	250	700	2098	C	A	71/B	–
17"	225/65 R 17 102H	6.0 – 8.0	237	736	2208	C	A	71/B	–
	225/65 R 17 106V XL	6.0 – 8.0	237	736	2208	C	A	72/B	–
	235/65 R 17 108V XL	6.5 – 8.5	250	750	2251	C	A	72/B	–
	245/65 R 17 111V XL	7.0 – 8.5	258	762	2288	C	A	72/B	–
	255/65 R 17 110H	7.0 – 9.0	270	778	2330	C	A	72/B	–
	265/65 R 17 112H	7.5 – 9.5	283	790	2367	C	A	72/B	–
	215/60 R 17 96H	6.0 – 7.5	230	700	2105	C	A	71/B	–
	215/60 R 17 96V	6.0 – 7.5	230	700	2105	C	A	71/B	–
	215/65 R 17 99V	6.0 – 7.5	230	724	2172	C	A	71/B	–
	225/60 R 17 99V	6.0 – 8.0	237	712	2141	C	A	71/B	–
	235/60 R 17 102V	6.5 – 8.5	250	726	2178	C	A	71/B	–
	235/55 R 17 99H	6.5 – 8.5	255	700	2105	C	A	71/B	–
	235/55 R 17 99V	6.5 – 8.5	255	700	2105	C	A	71/B	–
	275/55 R 17 109V	7.5 – 9.5	295	746	2239	C	A	72/B	–
	225/50 R 18 99W XL	6.0 – 8.0	242	693	2083	C	A	72/B	–
	225/60 R 18 100H	6.0 – 8.0	237	737	2217	C	A	71/B	–
	235/60 R 18 103V	6.5 – 8.5	250	751	2254	C	A	71/B	–
18"	235/60 R 18 107W XL	6.5 – 8.5	250	751	2254	C	A	72/B	–
	255/60 R 18 112V XL	7.0 – 9.0	270	775	2327	C	A	73/B	–
	215/55 R 18 99V XL	6.0 – 7.5	235	703	2114	C	A	72/B	–
	225/55 R 18 98V	6.0 – 8.0	242	715	2150	C	A	71/B	–
	235/55 R 18 100H	6.5 – 8.5	255	725	2181	C	A	71/B	–
	235/55 R 18 100V	6.5 – 8.5	255	725	2181	C	A	71/B	–
	255/55 R 18 109Y XL	7.0 – 9.0	276	749	2248	C	A	73/B	–
	235/50 R 18 97V	6.5 – 8.5	255	703	2114	C	A	71/B	–
	235/50 R 18 101Y XL	6.5 – 8.5	255	703	2114	C	A	72/B	–
	225/55 R 19 99V	6.0 – 8.0	242	741	2230	C	A	71/B	–
	235/45 R 19 99W XL	7.5 – 9.0	245	703	2120	C	A	72/B	–
	235/55 R 19 105V XL	6.5 – 8.5	255	751	2260	C	A	72/B	–
19"	235/55 R 19 105Y XL	6.5 – 8.5	255	751	2260	C	A	72/B	–
	245/45 R 19 102Y XL	7.5 – 9.0	253	711	2145	C	A	72/B	–
	255/55 R 19 111V XL	7.0 – 9.0	276	775	2327	C	A	73/B	–
	255/55 R 19 111Y XL	7.0 – 9.0	276	775	2327	C	A	73/B	–
	235/50 R 19 99V	6.5 – 8.5	255	729	2193	C	A	71/B	–
	255/50 R 19 107Y XL	7.0 – 9.0	276	749	2254	C	A	73/B	–
	265/50 R 19 110Y XL	7.5 – 9.5	288	759	2284	C	A	73/B	–
	275/45 R 19 108Y XL	8.5 – 10.5	284	741	2230	C	A	73/B	–
	285/45 R 19 111W XL	9.0 – 10.5	296	749	2254	C	A	75/B	–
	235/50 R 20 104W XL	6.5 – 8.5	255	754	2270	C	A	72/B	–
	245/45 R 20 103Y XL	7.5 – 9.0	253	736	2220	C	A	72/B	–
	255/45 R 20 105Y XL	8.0 – 9.5	265	748	2251	C	A	73/B	–
20"	265/45 R 20 108Y XL	8.5 – 10.0	277	756	2275	C	A	73/B	–
	275/45 R 20 110Y XL	8.5 – 10.5	284	766	2306	C	A	73/B	–
	255/50 R 20 109Y XL	7.0 – 9.0	276	774	2330	C	A	73/B	–
	255/55 R 20 110Y XL	7.0 – 9.0	276	800	2403	C	A	73/B	–
	275/40 R 20 106Y XL	9.0 – 11.0	289	736	2220	C	A	73/B	–
	315/35 R 20 110Y XL	10.5 – 12.5	333	736	2220	C	A	75/B	–
	295/35 R 21 107Y XL	10.0 – 11.5	313	747	2254	C	A	75/B	–
	255/40 R 21 102Y XL	8.5 – 10.0	270	745	2248	C	A	73/B	–
	265/40 R 21 105Y XL	9.0 – 10.5	282	753	2272	C	A	73/B	–
	275/45 R 21 110Y XL	8.5 – 10.5	284	791	2382	C	A	73/B	–
	275/50 R 21 113W XL	7.5 – 9.5	295	821	2465	C	A	73/B	–
	285/40 R 21 109Y XL	9.5 – 11.0	302	771	2320	C	A	75/B	–
21"	265/40 R 22 106Y XL	9.0 – 10.5	282	779	2350	C	A	73/B	–
	275/35 R 22 104Y XL	9.0 – 11.0	289	759	2290	C	A	73/B	–
	275/40 R 22 108Y XL	9.0 – 11.0	289	787	2376	C	A	73/B	–
	285/40 R 22 110Y XL	9.5 – 11.0	302	797	2400	C	A	73/B	–
	HL275/45 R 22 115W	8.5 – 9.5	284	817	2461	C	A	73/B	–
22"	285/35 R 23 107Y XL	9.5 – 11.0	302	792	2391	C	A	75/B	–
Grabber GT									
15"	235/75 R 15 109T XL	6.0 – 8.0	244	747	2236	D	C	72/B	–
17"	255/60 R 17 106V	7.0 – 9.0	270	750	2251	D	C	72/B	–

GRABBER A/S 365

YOUR ACCESS TO ANY SEASON



Grab the next mile and ride with confidence. General Tire's SUV All Season tyre combines SUV specific toughness with reliable performance in all weather conditions.



» **Ready for the fast lane.**

The GRABBER A/S 365 features solid shoulder blocks in longitudinal direction and delivers high levels of grip that leads to short braking distances on dry roads.

» **Safe on wet roads.**

Extra wide grooves evacuate slush and water from the contact patch, efficiently increasing safety and aquaplaning resistance.

» **Good to go on snow.**

The optimised sipe technology in the central part of the pattern provides excellent traction in slippery conditions and short braking distances on snowy and icy roads.



Speed Index	Size	Rim Size	Series
V / H / W	215 - 255 mm	17" - 19"	50 - 65



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
17"	225/65 R 17 102V	6.0 - 8.0	237	736	2208	D	C	72/B	✓
	235/65 R 17 108V XL	6.5 - 8.5	250	750	2251	D	C	72/B	✓
	215/60 R 17 96H	6.0 - 7.5	230	700	2105	E	C	72/B	✓
	235/55 R 17 103V XL	6.5 - 8.5	255	700	2105	C	C	72/B	✓
18"	235/60 R 18 107V XL	6.5 - 8.5	250	751	2254	D	C	72/B	✓
	215/55 R 18 99V XL	6.0 - 7.5	235	703	2114	D	C	72/B	✓
	255/55 R 18 109V XL	7.0 - 9.0	276	749	2248	D	C	73/B	✓
19"	235/55 R 19 105W XL	6.5 - 8.5	255	751	2260	D	C	72/B	✓
	255/50 R 19 107V XL	7.0 - 9.0	276	749	2254	D	C	73/B	✓

¹⁾ All sizes with rim protection (FR)



SNOW GRABBER PLUS

YOUR ACCESS TO ANY WINTER ADVENTURE



The non-studded winter tyre line specifically designed for SUV/4x4 vehicles takes you anywhere, even in the worst wintry conditions.



» Experience exceptional traction in winter.

Snow ridges help stay in control on snow-covered roads providing excellent grip especially when cornering. Jagged groove walls provide a wider contact area that accomplishes shorter braking distances on snow and additionally they help compensate a drop in snow performance resulting from reduced tread depth. Exceptional wintertime traction is guaranteed!

» Reinforce your confidence.

The SNOW GRABBER PLUS utilises a robust structure concept with Tread Block Reinforcement Buttress that adds strength and rigidity to tread blocks and reduces block damage. Interlocking SUV winter sipes decrease squirm and block deformation which improve stability when the vehicle is loaded heavily. Ultra high-strength steel belts achieve exceptional penetration resistance and a uniform footprint for confident stability during your winter adventure.

» Enjoy extra mileage.

The computer-optimised pattern design achieves a uniform material distribution which lets you gather more miles thanks to the even wear shape. The optimised pattern stiffness allows an even pressure distribution which minimises wear-causing distortion. Benefit from the extended tread life that lets you enjoy extra miles!



Speed Index	Size	Rim Size	Series
T / H / V	205 – 275 mm	15" – 20"	40 – 75



Rim diameter	Size ¹⁾	Permitted rim widths (in inch)	Tyre dimensions Max. standard value in operation		Rolling circumference + 1.5% - 2.5% (mm)				
			width (mm)	outer diameter (mm)					
15"	235/75 R 15 109T XL	6.0 – 8.0	244	747	2236	D	C	72/B	✓
	205/70 R 15 96T	5.0 – 7.0	217	681	2040	D	C	72/B	✓
16"	225/75 R 16 104T	6.0 – 7.5	232	758	2269	E	C	72/B	✓
	215/70 R 16 100H	5.5 – 7.0	230	720	2159	D	C	72/B	✓
	225/70 R 16 103H	6.0 – 7.5	237	734	2202	D	C	72/B	✓
	235/70 R 16 106T	6.0 – 8.0	250	750	2245	D	C	72/B	✓
	245/70 R 16 107T	6.5 – 8.0	258	764	2288	D	C	72/B	✓
	265/70 R 16 112H	7.0 – 9.0	283	792	2373	D	C	73/B	✓
17"	215/65 R 16 98H	6.0 – 7.5	230	698	2092	D	C	72/B	✓
	215/65 R 17 99V	6.0 – 7.5	230	724	2172	C	C	72/B	✓
	225/65 R 17 106H XL	6.0 – 8.0	237	736	2208	D	C	72/B	✓
	235/65 R 17 108H XL	6.5 – 8.5	250	750	2251	D	C	72/B	✓
	215/60 R 17 96H	6.0 – 7.5	230	700	2105	E	C	72/B	✓
	225/60 R 17 103H XL	6.0 – 8.0	237	712	2141	D	C	72/B	✓
	235/60 R 17 106H XL	6.5 – 8.5	250	726	2178	D	C	72/B	✓
	235/55 R 17 103V XL	6.5 – 8.5	255	700	2105	D	C	72/B	✓
18"	225/60 R 18 104V XL	6.0 – 8.0	237	737	2217	C	C	72/B	✓
	215/50 R 18 92V	6.0 – 7.5	235	681	2053	D	C	72/B	✓
	215/55 R 18 99V XL	6.0 – 7.5	235	703	2114	D	C	72/B	✓
	225/50 R 18 99V XL	6.0 – 8.0	242	693	2083	D	C	72/B	✓
	235/60 R 18 107H XL	6.5 – 8.5	250	751	2254	D	C	72/B	✓
	235/60 R 18 107V XL	6.5 – 8.5	250	751	2254	C	C	72/B	✓
	265/60 R 18 114H XL	7.5 – 9.5	283	787	2364	D	C	72/B	✓
	225/55 R 18 102V XL	6.0 – 8.0	242	715	2150	D	C	72/B	✓
	235/55 R 18 104H XL	6.5 – 8.5	255	725	2181	D	C	72/B	✓
	255/55 R 18 109V XL	7.0 – 9.0	276	749	2248	D	C	73/B	✓
	255/55 R 18 109H XL	7.0 – 9.0	276	749	2248	D	C	73/B	✓
	235/55 R 19 105V XL	6.5 – 8.5	255	751	2260	D	C	72/B	✓
19"	255/55 R 19 111V XL	7.0 – 9.0	276	775	2327	D	C	73/B	✓
	235/50 R 19 103V XL	6.5 – 8.5	255	729	2193	D	C	72/B	✓
	255/50 R 19 107V XL	7.0 – 9.0	276	749	2254	D	C	73/B	✓
	225/55 R 19 103V XL	6.0 – 8.0	242	741	2230	D	C	72/B	✓
	255/45 R 20 105V XL	8.0 – 9.5	265	748	2251	D	C	73/B	✓
	265/45 R 20 108V XL	8.5 – 10.0	277	756	2275	D	C	73/B	✓
20"	275/45 R 20 110V XL	8.5 – 10.5	284	766	2306	D	C	73/B	✓
	275/40 R 20 106V XL	9.0 – 11.0	289	736	2220	D	C	73/B	✓

¹⁾ All sizes with rim protection (FR)

C – E
Fuel Efficiency

C
Wet Grip

B (72/73 dB)
Noise

Snow Grip



TECHNOLOGIES



High-tensile steel belts provide exceptional penetration resistance, uniform footprint pressure and stability at high speeds.



The VAI (Visual Alignment Indicator) allows the vehicle owner to avoid uneven wear of the tyres. If the sipes of the VAI wear off differently, there is a potential misalignment of the wheels.



The RTM (Replacement Tire Monitor) provides the vehicle owner with added safety by indicating the need to replace the tyres. Before the pattern reaches the minimum tread depth, the inscription will change to REPLACE TIRE.





GENERAL TIRE

BORN IN THE US IN 1915.
GENERAL TIRE. A BRAND OF CONTINENTAL.

**ANYWHERE
IS POSSIBLE**